Trickle Vent Detail: 33mm Slim Frame with 42mm Extension

7/08/2014

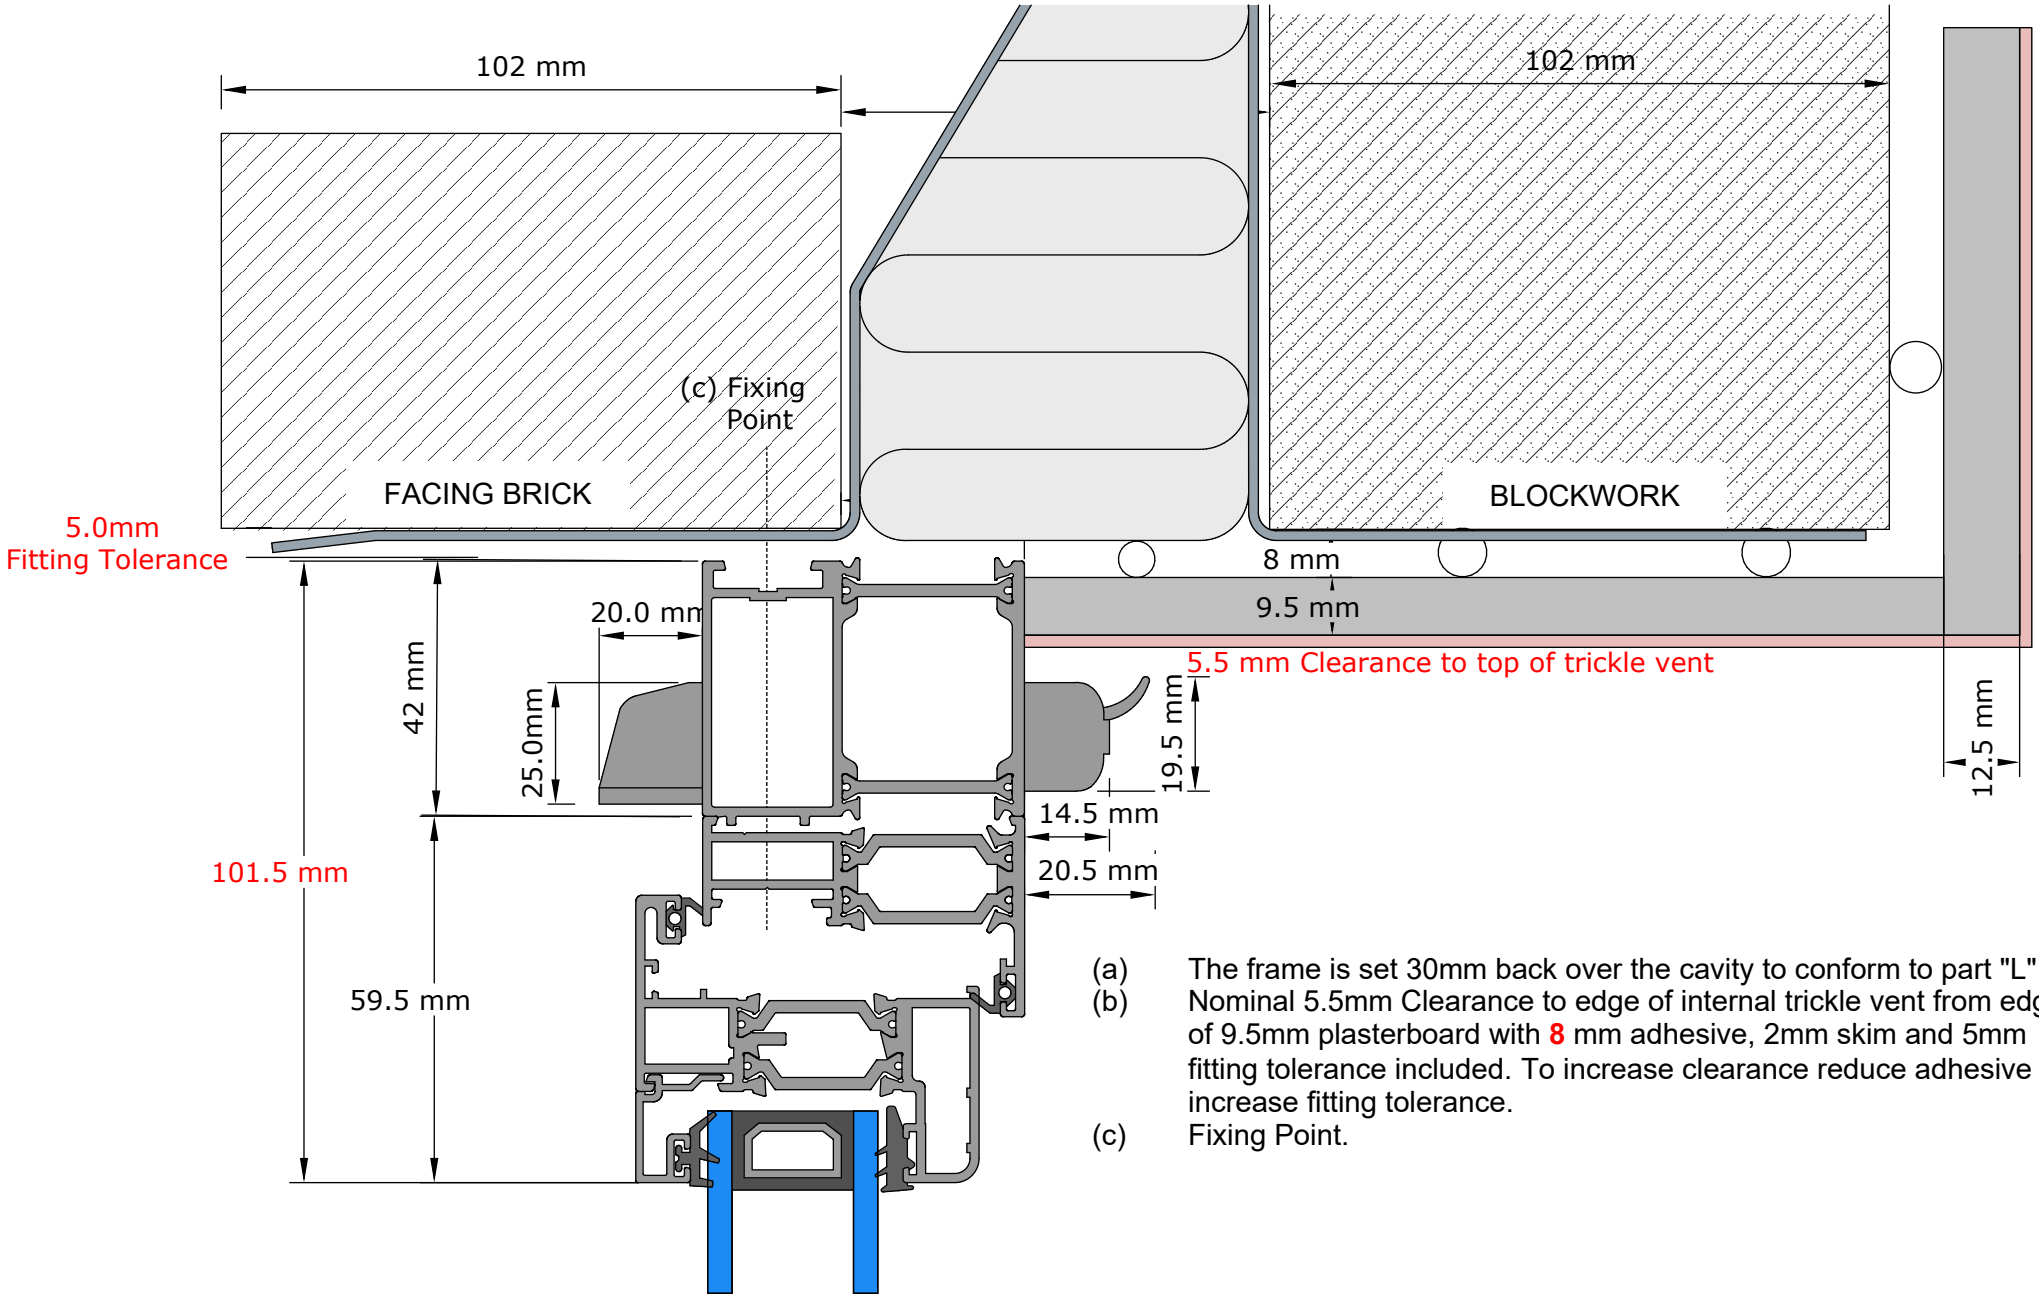

(a) The frame is set 30mm back over the cavity to conform to part "L".

(b) Nominal 5.5mm Clearance to edge of internal trickle vent from edge of 9.5mm plasterboard with **8** mm adhesive, 2mm skim and 5mm fitting tolerance included. To increase clearance reduce adhesive or increase fitting tolerance.

(c) Fixing Point.

© Slide and Fold Ltd, 82 Curriers Close, Canley, Coventry. CV4 8AW
Tel:024 76 694 162

Slide and Fold